


Special LED Products

SMDflat345KU

Wire to wire IDC LED Connectors

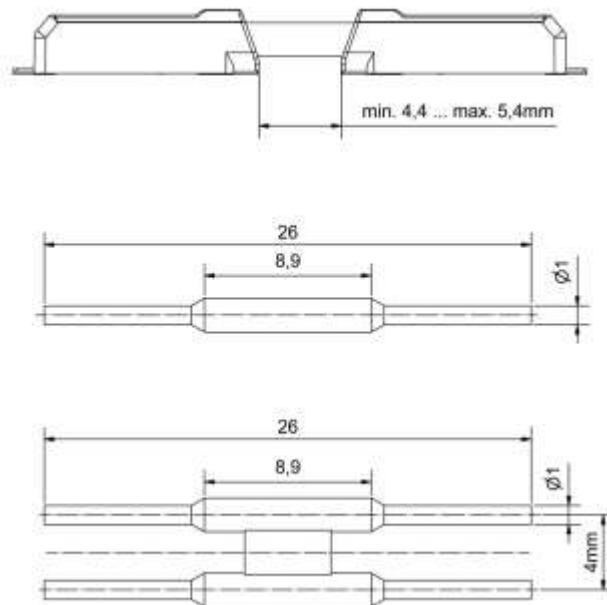

FEATURES

Metway SMDflat345KU connecting links for the SMDflat345 allow to quickly and easily join a number of LED circuit boards

They available in 1 and 2 pole versions.

Compared with manual wiring, the required effort can be considerably reduced.

These elements have a length of 26 mm and allow a distance of 4.4 to 5.4 mm between each connectors.

- 1 and 2 pole coupling links immediately available
- no tool required for installation
- safe and reliable connection of LED boards
- optional distance of 4.4 – 5.4 mm between connectors

Part Numbers:

SMDFLAT345KU1 – 1 pole version
SMDFLAT345KU2 – 2 pole version

TECHNICAL DETAILS

Mouldings	PA, white flammability rating to UL 94: V-2
Contacts	copper, plated
Voltage rating	1 pole: 600 V to EN 60598-1 2 pole: 250 V to EN 60598-1
Current rating	6 A
Lower limit temperature	-30 °C
Upper limit temperature	105 °C
Protection class	IP 00
Packaging	PE-bag

